


# ***LT-500 PS***

## ***USER MANUAL***



*Version:1.0*

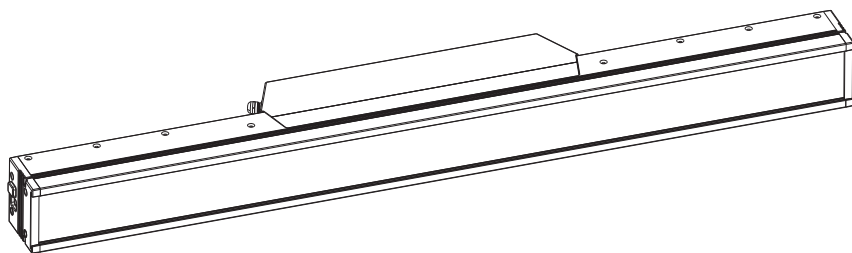



## Table of content

1.Open–Package guidelines.....	1
1. 1 Package.....	1
2.Safety instructions.....	1
3.Operating determination.....	2
4.Rigging the fixture.....	3
4.1 Mounting.....	3
4.2Installing the Clamps.....	3
4.3 Power supply connection and cut off.....	4
4.4 Power Connection.....	4
4.5 DMX–512 connection/connection between fixtures.....	4
5.Description of the device.....	6
6.Dimension.....	6
7.Display control.....	7
7.1 Navigation in the Menu.....	7
7.2 Menu Maps.....	7
8.DMX protocol.....	9
9.Maintance and cleaning.....	11
10.Electric equipment specification.....	12
10.1 Electrical paramters.....	12
10.2 Weight and dimensions.....	12
10.3 Channel Characteristics.....	12
10.4 Menu Function.....	12
10.5 light table.....	12

Congratulations on choosing our products! Please carefully read this instruction manual in its entirety and keep it well for using reference. This manual contained about the installation and the relative using information of this products. Please refer to this manual's relative instruction when using this equipment.

## 1.Open–Package guidelines

This equipment is made of new style,high intensity plastic.It fully shows the modern times light characteristic with beauty structure. And it is made according to CE standard. Fully agree with the international standard of DMX512 agreement.

When receive the product,please be careful to take and put,check if the product has damage or not because of transportation, and check the following parts:

- |                    |                      |
|--------------------|----------------------|
| 1.Signal cable-1PC | 2. Safty cable-1PC   |
| 3.User Manual-1PC  | 4. Power cable-1PC   |
| 5.Service card-1PC | 6.Omega bracket-2PCS |

### **1.1 Package**

Unpacking the fixture

- 1.Open the flight case cover.
- 2.With one person on each side, lift the fixture out of the flight case.

Packing the fixture

- 1.Disconnect the fixture from power and allow it to cool.
- 2.Adjust the rotating support ,place it in the box.

## 2.Safety instructions

Every person involved with installation and maintenance of this device to:

- Be qualified
- Follow the instructions of this manual.








This device has been shipped with our premises in absolutely perfect condition.In order to maintain this condition and to ensure a safe operation,it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.

### **Important:**

- The manufacturer will not accept liability for any resulting damages caused by the nonobservance of this manual or any unauthorized modification to the device.
- Please consider that damages caused by manual modifications to the device are not subject to warranty.
- Never let the power-cord come into contact with other cables! Handle the power cord and all connections with particular caution!
- Make sure that the available voltage is not higher than stated on the rearpanel.
- Always plug in the power plug least. Make sure that the power-switch is set to off-position before you connect it with the mains with particular caution!
- Make sure that the power-cord is never crimped or damaged by sharp edges.Check the device and the power-cord from time to time.
- Always disconnect from the mains, when the device is not in use or before cleaning it.
- Only handle the power-cord by the plug.Never pull out the plug by tugging the powercord.
- This device falls under protection class I.Therefore it is essential to connect the yellow/green conductor to earth.
- The electric connection,repairs and servicing must be carried out by a qualified employee.
- Do not connect this device to a dimmer pack.
- Do not switch the fixture on and off in short intervals as this would reduce the lamp's life.
- Do not touch the device's housing bare hands during its operation(housing becomes hot)!
- For replacement use lamps and fuses of same type and rating only.

### **Eye damage!**

**Avoid looking directly into the light source(meant especially for epileptics)!**

	<p>➤ <b>Minimum distance of illuminated objects</b> The projector needs to be positioned so that the objects hit by the beam of light are at least 0.80 metres from the lens of the projector.</p>
$t_a$ 45°C	<p>➤ <b>Maximum ambient temperature</b> Do not operate the fixture if the ambient temperature (<math>T_a</math>) exceeds 45°C (113°F).</p>
$t_c$ 80°C	<p>➤ <b>Temperature of the external surface</b> The maximum temperature that can be reached on the external surface of the fitting, in a thermally steady state, is 80°C (176°F).</p>
IP 20	<p>➤ <b>IP20 protection rating</b> The fitting is protected against penetration by solid of over 12mm (0.47") in diameter (first digit 2), but not against dripping water, rain, splashes or jets of water (second digit 0).</p>
	<p>➤ <b>Photobiological Safety</b> CAUTION. Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to the eyes.</p>
	<p>➤ <b>Light collimation system</b> This product contains internal light collimation system. Avoid intense light from any angle.</p>
	<p>➤ <b>The products to which this manual refers comply with the European Directives pursuant to:</b></p> <ul style="list-style-type: none"> <li>• Safety of electrical equipment supplied at low voltage (LVD) EN 60598-1:2015 EN 60598-2-17:1989+A2:1991</li> <li>• Electromagnetic Compatibility (EMC) EN 55015:2013/A1:2015 EN 61000-3-2:2014 EN 61000-3-3:2013 EN 61547:2019</li> </ul>
<b>CE</b>	
	<p><b>Protection against electrical shock</b> Connection must be made to a power supply system fitted with efficient earthing (Class I appliance according to standard EN 60598-1). It is, moreover, recommended to protect the supply lines of the projectors from indirect contact and/or shorting to earth by using appropriately sized residual current devices.</p>

### 3. Operating determinations

- This device is a moving-head for creating decorative effects and was designed for indoor use only.
- If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your device. Leave the device switched off until it has reached room temperature.
- Never run the device without lamp!
- Do not shake the device. Avoid brute force when installing or operating the device.
- Never lift the fixture by holding it at the projector head, as the mechanics may be damaged. Always hold the fixture at the transport handles.
- When choosing the installation spot, please make sure that the device is not exposed to heat, moisture or dust. There should not be any cables lying around. You endanger your own and the safety of others!

- The minimum distance between light output and the illuminated surface must be more than 0.2 meters.
- Make sure that the area below the installation place is blocked when rigging, derigging or servicing the fixture.
- Always fix the fixture with an appropriate safety rope, Fix the safety rope at the correct holes only.
- Operate the fixture after having checked that the housing is firmly closed and all screws are tightly fastened.
- The lamp must never be ignited if the objective-lens or any housing-cover is open, as discharge lamps may explode and emit a high ultraviolet radiat, which may cause burns.
- The maximum ambient temperature 40° C must never be exceeded.
- Operate the device only after having familiarized with its functions. Do not permit operation by persons not qualified for operating the device. Most damages are the result of unprofessional operation!
- Please use the original packaging if the device is to be transported.
- Please consider that unauthorized modifications on the device are forbidden due to safety reasons!
- If this device will be operated in any way different to the one described in this manual, the product may suffer damages and the guarantee becomes void. Furthermore, any other operation may lead to dangers like short-circuit, burns, electric shock, burns due to ultraviolet radiation, lamp explosion, crash etc.

## 4. Rigging the fixture

### 4.1 Mounting



**Pay attention to the regulations of CE.**

**Installation by qualified staff to complete.**

- ☞ For the various mounting positions of the FIXTURE (standing on the floor, sideways or hanging different accessories kits are available).
- ☞ Through this a safe and firm installation is assured.
- ☞ You'll find special connectors on the bottom side of the system which are put to use here.

### 4.2 Installing the Clamps

Please consider the respective national norms during the installation! The installation must only be carried out by an authorized dealer!

The installation of the projector has to be built and constructed in a way that it can hold 10 times the weight for 1 hour without any harming deformation.

The installation must always be secured with a secondary safety attachment, e.g. an appropriate catch net. This secondary safety attachment must be constructed in a way that no part of the installation can fall if the main attachment fails.

When servicing the fixture staying in the area below the installation place, on bridges, under high working places and other endangered areas is forbidden.

The operator has to make sure that safety-relating and machine-technical installations are approved by an expert before taking into operation for the first time and after changes before taking into operation another time.

The operator has to make sure that safety-relating and machine-technical installations are approved by an expert after every four years in the course of an acceptance test.

The operator has to make sure that safety-relating and machine-technical installations are approved by a skilled person once a year.

The projector should be installed outside areas where persons may walk by or be seated.

**Important!** Overhead rigging requires extensive experience CE, including (but not limited to) calculating working load limits, installation material being used, and periodic safety inspection of all installation material and the projector. If you lack these qualifications, do not attempt the installation yourself, but instead use a professional structural rigger. Improper installation can result in bodily injury and or damage to property.

The projector has to be installed out of the reach of people.

If the projector shall be lowered from the ceiling or high joists, professional trussing systems have to be used. The projector must never be fixed swinging freely in the room.

**Caution** Projectors may cause severe injuries when crashing down! If you have doubts concerning the safety of a possible installation, do not install the projector!

Before rigging make sure that the installation area can hold a minimum point load of 10 times the projector's weight.

The projector can be placed directly on the stage floor or rigged in any orientation on a truss without altering its operation characteristics.

For overhead use, always install a safety-rope that can hold at least 10 times the weight of the fixture. You must only use safety-ropes with screw-on carabines. Pull the safety-rope through the two apertures on the bottom of the base and over the trussing system etc.



**Warning:** it is necessary to make sure that the installation location is perfectly appropriate, and the installation location is safe and reliable.

### 4.3 Power supply connection and cut off

Connect the light source to the main power source with the plug of the power cord, or cut off the power supply:

### 4.4 Power Connection

If you wish to change the power supply settings, see the chapter appendix. Connect the fixture to the mains with the enclosed power cable and plug.




**Warning:** please verify the power of the power supply equipment prior to the connection! Earth wire must be grounded!

CABLE(EU)	CABLE(US)	Pin	INTERNATIONAL
Brown	Black	Live	<b>L</b>
Light blue	White	Neutral	<b>N</b>
Yellow/Green	Green	Earth	

### 4.5 DMX-512 connection/connection between fixtures

Only use stereo shielded cable and 3-pin XLR-plugs and connectors in order to connect.



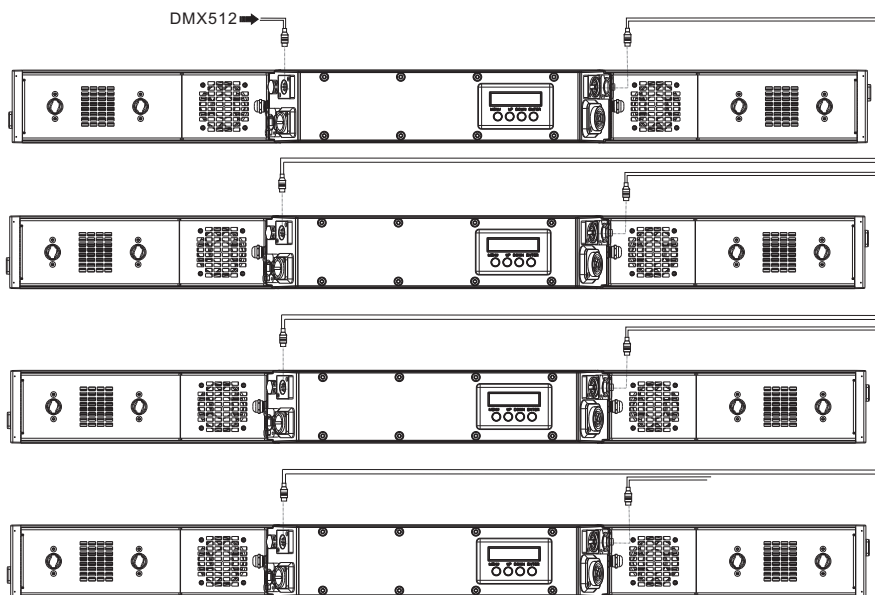

Max loop 3 fixture at 110V, Max loop 6 fixture at 240V.

### Caution

At the last fixture, the DMX-cable has to be terminated with a terminator. solder a 120 resistor between signal(-) and Signal (+) into a 3-pin XLR-plug and plug it in the DMX-output of the last fixture.



DMX output 3-pin XLR socket      DMX input 3-pin XLR socket




- 1: Ground
- 2: Signal (-)
- 3: Signal (+)

### DMX Terminator Diagram

-For installations where the DMX cable has to run a long distance or is in an electrically noisy environment it is recommended to use a DMX terminator. This helps in preventing corruption of the signal by electrical noise. The DMX terminator is simply an XLR plug with a 120Ω resistor connected between pins 2 and pins 3, which is then plugged into the output XLR socket of the last fixture in the chain.




## 5. Description of the device

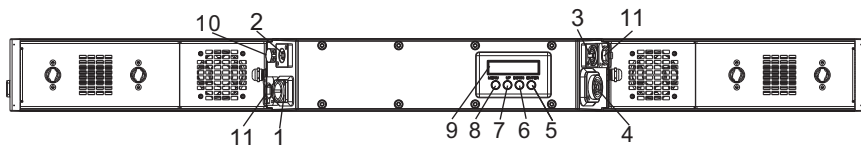

- 1.Power-In
- 2.3-pin XLR male
- 3.3-pin XLR female
- 4.Power-Out
- 5.ENTER button
- 6.DOWN button
- 7.UP button
- 8.MODE button
- 9.LED display
- 10.Respirator
- 11.ETHERNET

## 6.Dimension

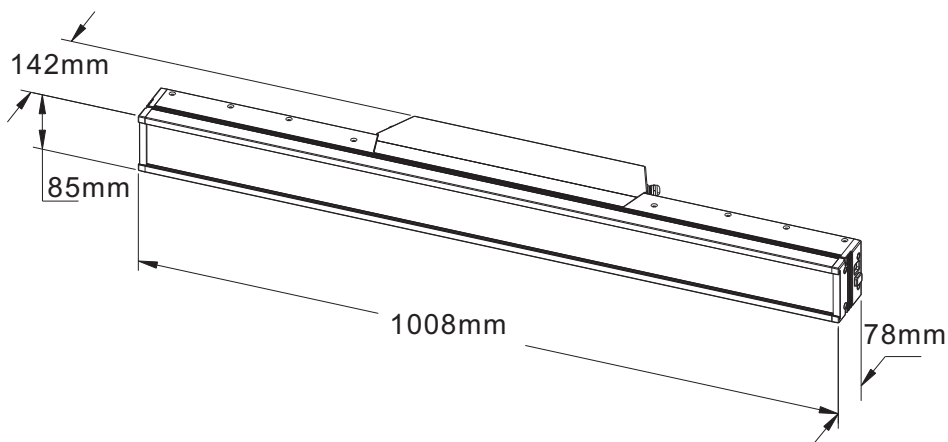

## 7.Display control

### 7.1 Navigation in the Menu

Using the buttons, and this can be simply and easily set the address code and function code.

If you view or modify the lighting feature set, then press ENTER button, the display will enter the menu interface. Both there is sub menu corresponding to the functional operation of the main menu. Each of the menus is representative of the specific features of the lamp. The specific contents shows as the table menu below.

Set or browse lighting function, press UP or DOWN button.

Press ENTER to save your changes or enter the submenu.Press the UP or DOWN can change the numerical (increase or decrease in value).

Press the MODE button to return to menu.

### 7.2 Menu Maps

Setup	DMX Address	001-512		
	Mode	Mode 1: 1-11*		
		Mode 2: 1-14		
		Mode 3: 1-6		
		Mode 4: 1-22		
		Mode 5: 1-100		
	No DMX	Close*		
		Hold		
		Static Mode		
	Source	DMX*		
	(If the Ethernet module is installed)	Art-Net		
	Ethernet (If the Ethernet module is installed)	IP Address	XXX.XXX.XXX.XXX	
		Netmask	XXX.XXX.XXX.XXX	
		Universe	000-XXX	
		Ethernet To DMX	ON / OFF*	
Personality	Dimmer Curve	Linear *		
		Theatrical		
		Square Law		
		Inverse Square		
	Dimmer Speed	Fast*		
		Smooth		
	PWM	1200 Hz*		
		2400 Hz		
		4800 Hz		
		9600 Hz		
		25000 HZ		
	Display	ON*/OFF 03M		
	RDM	ON*/OFF		
	Reverse LED	Off*/ON		
	Fan mode	Auto		
		High		
	Boot Animation	Disable		
		Enable*		
	Ethernet	Off*/ON		

Static Mode	Red	0-255		
	Green	0-255		
	Blue	0-255		
	Preset CCTs	0-255		
	Shutter	0-255		
	Dimmer	0-255		
	Shape Selection	0-255		
	Shape Speed	0-255		
	Shape Fade	0-255		
	Shape Red	0-255		
	Shape Green	0-255		
	Shape Blue	0-255		
	Shape Strobe	0-255		
	Shape Dimmer	0-255		
	Strobe Effect Selection	0-255		
	Strobe Effect Speed	0-255		
	Strobe Effect Fade	0-255		
	Strobe Engine Dimmer	0-255		
	Strobe Engine Duration	0-255		
	Strobe Engine Rate	0-255		
	Reset ALL	Yes/NO		
Service	LED Calibration	Red	0-255	
		Green	0-255	
		Blue	0-255	
		Strobe LED	0-255	
	Factory Default	No/Yes		
Information	Fixture time	Resettable	xxx H xxM	
		Total	xxx H xxM	
		Clear Resettable	Clear/Cancel	
	Fixture Temp.	Actual	xxx C/F	
		Max	xxx C/F	
		Reset Max	Cancel / Confirm	
	DMX Monitor	DMX DATA		
	Firmware version	x.x.x.x		
	UID	xxxx		
	MAC Address	xx.xx.xx.xx.xx		

## 8.DMX protocol

Mode1	Mode2	Mode3	Mode4	Mode5	Fade Type	Function	Dmx Value
1	1	1	1	*	Red	0→100%	0-255
*	2	*	*	*	Red fine	0→100%	0-255
2	3	2	2	*	Green	0→100%	0-255
*	4	*	*	*	Green fine	0→100%	0-255
3	5	3	3	*	Blue	0→100%	0-255
*	6	*	*	*	Blue fine	0→100%	0-255
4	7	*	4	*	Preset CCTs	Preset CCTs	0-255
5	8	*	5	*	Shutter	Open	0 - 10
						Close	11 - 15
						Random Strobe	16 - 47
						Ramp Up	48 - 79
						Ramp Down	80 - 111
						Ramp Up & Ramp Down	112 - 143
						Strobe (Slow1hz→Fast25hz)	144 - 239
						Close	240 - 249
6	9	*	6	*	Dimmer	Open	250 - 255
						Dimmer 0-100%	0-255
7	10	*	7	*	Dimmer fine	Dimmer fine 0-100%	0-255
8	11	*	8	*	Function	Reserved	0 - 55
						Dimmer Speed: Smooth	56 - 60
						Dimmer Speed: Fast	61 - 65
						Reserved	66 - 70
						Dimmer Curve: Linear	71 - 75
						Dimmer Curve: Threatrical	76 - 80
						Dimmer Curve: Sqaure Law	81 - 85
						Dimmer Curve: Inverse Sqaure Law	86 - 90
						Reserved	91 - 95
						No DMX: Hold	96 - 100
						No DMX: Shutter Closed	101 - 105
						No DMX: Static Mode	106 - 110
*	*	*	9	*	Shape Selection	Reserved	111 - 255
						Static	0-2
						Animator	3-79
						Random	80-135
						Reserved	136-145
*	*	*	10	*	Animator Shape Speed	Reserved	146-255
						Animator Shape Speed slow to fast	0-10
*	*	*	11	*	Shape Fade	Animator Shape Speed	11-255
*	*	*	12	*	Shape Red	Shape Fade	0-255
*	*	*	13	*	Shape Green	Shape Red 0-100%	0 - 255
*	*	*	14	*	Shape Blue	Shape Green 0-100%	0 - 255
*	*	*	15	*	Shape Strobe	Shape Blue 0-100%	0 - 255
*	*	*	16	*	Shape Dimmer	Shape Strobe	0-255
*	*	*	17	*	Strobe Engine Selection	Shape Dimmer 0-100%	0 - 255
						Reserved	0 - 2
						Static	0-2
						Animator	3-79
						Random	80-135
*	*	*	18	*	Animator Strobe Engine Speed	Reserved	136-145
						Reserved	146-255
*	*	*	18	*	Animator Strobe Engine Speed	Reserved	0-10
						Animator Strobe Engine Speed slow to fast	11-255

Mode1	Mode2	Mode3	Mode4	Mode5	Fade Type	Function	Dmx Value
*	*	*	19	*	Strobe Engine Fade	Strobe Engine Fade	0 – 255
9	12	4	20	*	Strobe Engine Dimmer	Strobe Engine Dimmer 0–100%	0 – 255
10	13	5	21	*	Strobe Engine Duration	Strobe Engine Duration	0– 255
11	14	6	22	*	Strobe Engine Rate	Strobe Engine Rate	0 – 255
*	*	*	*	1	Red 1	Red 1 0–100%	0–255
*	*	*	*	2	Green 1	Green 1 0–100%	0–255
*	*	*	*	3	Blue 1	Blue 1 0–100%	0–255
*	*	*	*	4	Red 2	Red 2 0–100%	0–255
*	*	*	*	5	Green 2	Green 2 0–100%	0–255
*	*	*	*	6	Blue 2	Blue 2 0–100%	0–255
*	*	*	*	7	Red 3	Red 3 0–100%	0–255
*	*	*	*	8	Green 3	Green 3 0–100%	0–255
*	*	*	*	9	Blue 3	Blue 3 0–100%	0–255
*	*	*	*	.	.	.	.
*	*	*	*	73	Red 25	Red 25 0–100%	0–255
*	*	*	*	74	Green 25	Green 25 0–100%	0–255
*	*	*	*	75	Blue 25	Blue 25 0–100%	0–255
*	*	*	*	76	Strobe 1	Strobe 1 0–100%	0–255
*	*	*	*	77	Strobe 2	Strobe 2 0–100%	0–255
*	*	*	*	78	Strobe 3	Strobe 3 0–100%	0–255
*	*	*	*	.	.	.	.
*	*	*	*	100	Strobe 25	Strobe 25 0–100%	0–255

## 9.Maintance and cleaning

**DANGER:Disconnect from the mains before starting any maintenance work.**

It is absolutely essential that the fixture is kept clean and that dust,dirt and smoke fluid residues must not buildup on or within the fixture. Otherwise, the fixtures light-output will be significantly reduced.Regular cleaning will not only ensure the maximum light-output, but will also allow the fixture to function reliably through out its life. A soft lint-free cloth moistened with any good glass cleaning fluid is recommended, under no circum stances should alcohol or solvents be used!

The front objective lens will require weekly cleaning as smoke-fluid tends to building up residues,reducing the light-output very quickly.The cooling-fans should be cleaned monthly.

The gobos may be cleaned with a soft brush,The interior of the fixture should be cleaned at least annually usinga vacuum-cleaner or an air-jet.

There are no serviceable parts inside the device except for the lamp and the fuse.

Replacing the fuse: If the lamp burns out,the fine-wire fuse of the device might fuse,too.Only replace the fuse by a fuse of same type and rating.Before replacing the fuse,unplug mains lead.

Maintenance and maintenance of the operation, please contact the manufacturer or distributor.

## 10. Electric equipment specification

### 10.1 Electrical paramters

SOURCE:RGB 400 LED-5050,W 200LED-3030  
 Max POWER:500W  
 VOLTAGE:AC100-240V 50/60HZ  
 Color temperature: 6500K(W)

### 10.2 Weight and dimensions

Dimensions : 1008X142X85mm  
 NET WEIGHT:10Kg


### 10.3 Channel Characteristics

- 1.Channel:11、14、6、22、100 DMX-512.
- 2.Demmer: linear dimmer.
- 3.Shutter: electronic shutter, random strobe.
- 4.LED individual control, presetting automatical temperature control system.

### 10.4 Menu Function

- 1.OLED display.
- 2.Display the time using of lighting feature and lamp as well as the times of turning on for lamp.
- 3.After the DMX signal is disconnected, the display will be bright and dark.
- 4.Software upgrade function.

### 10.5 light table

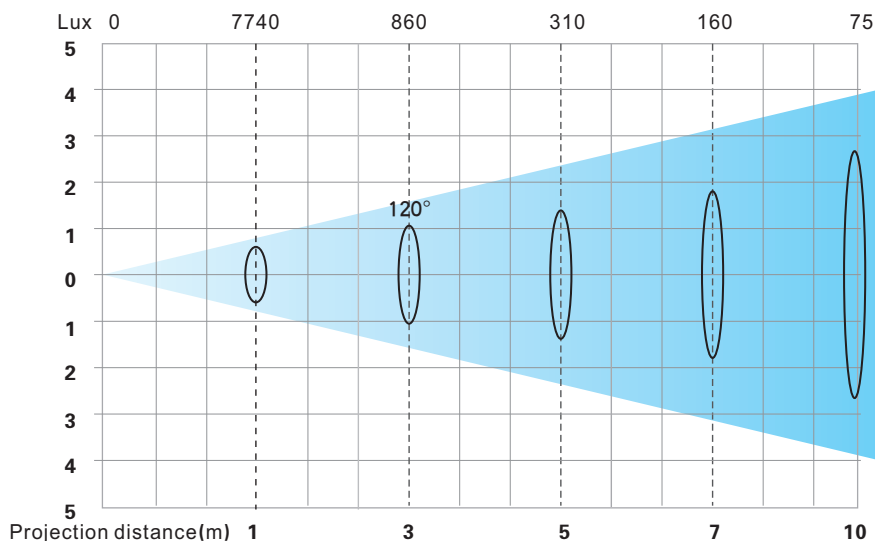



**Note: The above contents for reference only and is subject to change without prior notice, please take specification you have on hand and our company reserves the final right of interpretation.**







---

<http://www.jollylighting.com>

---

**Guangzhou hongcai stage equipment Co.,Ltd**

Tel:+862084558833 Fax:+862084559699

Email:[info@jollylighting.com](mailto:info@jollylighting.com) P.C:511450

Add:No.30,Changsha Street, Shachong Village,shiji Tow.Panyu District,Guangzhou,China